

# DHI-KTP01

## IP Villa Outdoor Station & Indoor Monitor



### IP Villa Door Station IP Indoor Monitor

- 2MP CMOS camera• IPC surveillance
- Mechanical button• Alarm integration
- Night vision & voice indicator• High performance
- 160° angle of view• Embedded 8GB SD card
- Group call• Support standard PoE
- Aluminium alloy plate
- IK07&IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Surface mounted and flush mounted
- Support standard PoE

### Technical Specification

Model	DHI-VTO2202F-P
-------	----------------

### System Parameter

Host Processor	Embedded processor
Camera	1/2.8" 2MP CMOS high definition low illumination colorful
Angle of View	H:160°, V:82°, D:180°
Focal Length	2 mm
WDR	Support
Noise Reduction	Noise suppression and echo cancellation
Video Encoding	H.264
Frame Rate	PAL:25 fps NTSC:30 fps
Audio Encoding	G.711 U
Video Bit Rate	256 K to 2 M
Light Compensation	IR Supplement

### Port

RS-485 Port	1
Alarm Output/Input	1/1
Lock Control	1 set
Door Status Detection	1 set
Eoc	1 set
Exit Button	1
Tamper Switch	1 set
Network Interface	1
Power Output	12V/100mA

### Alarm Parameter

Tamper Alarm	Support
Door Sensor Timeout Alarm	Support
Alarm Input	Support
Alarm Output	Support

### User Parameter

Audio Input	Built-in Omnidirectional Microphone
Audio Output	Built-in Loudspeaker
Status Indicator	Calling&Communication&Unlocked
Communication Methods	Digital communication
Unlock Mode	Remote unlocking
Auto Snapshot	Support
Leave Videos or Text Messages	Support
Storage	Extended 64 G TF Card
WEB Configuration	Support
Real-time Monitor	Support

### Normal Parameter

Housing Material	Aluminum
Power Supply Mode	POE or DC 12V
Installation Method	Supports surface mounted and flush mounted
Dimensions	130 mm×96 mm×28.5 mm (5.1"×3.78"×1.1")
Working Temperature	-30°C to +60°C (-22°F to +140°F)
Power Consumption	≤12W
Total Weight	0.35kg/0.77lb

## Technical Specification

Model	DHI-VTH2421FW-P
Main Processor	High performance embedded processor
Operating System	Embedded LINUX OS
Screen Type	Capacitive screen
Display	7-inch TFT screen
Resolution	1024 × 600
Video Compression	H.264
Audio Compression	G.711A/G.711U/PCM
Audio Input	1 channel all-direction microphone
Audio Output	Built-in 1.5W loudspeaker
Audio Mode	Support dual-way bidirectional talk
Audio Enhancement	Support echo cancellation/DNR
Audio Bit Rate	16 kbps
Communication Mode	Full digital
Information Release	Support to receive and view notifications issued by center Support
Leave Videos or Text Messages	Support to set DND period
DND Mode	9
Sub-station Quantity	
Alarm Input	6 channel (switch quantity)
Alarm Output	1 channel
Network	1 RJ-45
SOS Alarm	Support
Casing	PC+ABS
Appearance Color	Appearance Color
Power Supply	Power Supply
Installation	Wall mount
Accessories	Default bracket Default alarm cable 119.6 mm × 221.5 mm × 21.5 mm (4.71" × 8.72" × 0.85")
Dimensions	-10°C to +55°C (+14°F to +131°F)
Operating Temperature	10%RH-95%RH
Operating Humidity	Standby≤4W, work≤6W
Power Consumption	0.35 Kg (0.77 lb)
Gross Weight	PoE or DC 12V
Power Supply Mode	Support Micro SD, maximum memory capacity 32 G, standard memory capacity 8 G
Storage	

## Relevant Products

### DHI-KTP01(S)



DHI-VTH2421FW-P



PFS3005-4ET-60



DHI-VTO2202F-P



VTM115(Surface mounted)

### DHI-KTP01(F)



DHI-VTH2421FW-P



PFS3005-4ET-60



DHI-VTO2202F-P




VTM114  
(Flush mounted, Front)




VTM114  
(Flush mounted, Back)

## Dimensions (mm[inch])

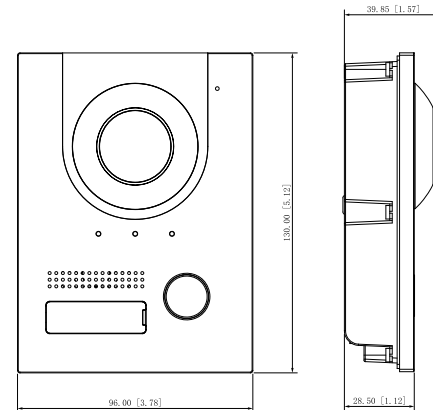

DHI-VTO2202F-P

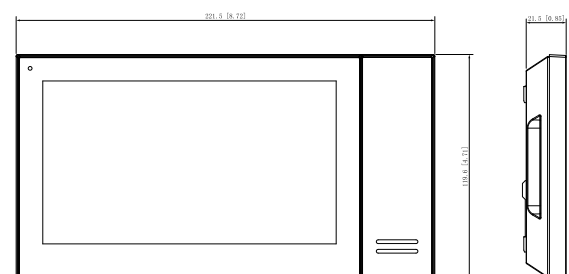

DHI-VTH2421FW-P

## Application

